


# CL50ZYALS3


## LED Indicator – Tower Light



### Features

- LED tower light
- Individually controllable
- Mechanical screw-in thread M30 x 1.5
- Protection class IP67
- Acoustic signaller, pulsed (COL 2)
- Monochrome: Yellow (COL 1)
- Cable, 2m
- Operating voltage 85...264 VAC
- Beeper: Sealed, pulsed tone max. 94 dB

### Wiring diagram

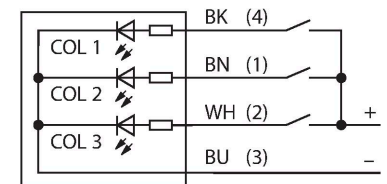

### Functional principle

Multicolor/multifunction display  
 Rugged and well-priced LED tower, easy to install  
 Illuminated segments for clear operator guidance and display of system status.  
 Display of up to 3 colors.  
 Compact devices, no controller required  
 No mounting

### Technical data

Type	CL50ZYALS3
ID	3088181
<b>Signal and display data</b>	
Purpose	LED indicator light
Function	Tower light
Light type	Yellow
LED service life (L70)	50000 h
Dimmable	no
Features of color 1	Yellow, Permanently on, 30 lm
acoustic signal	Pulsed, 94 dB
<b>Electrical data</b>	
Operating voltage	85...264 VAC
AC rated operational current	≤ 80 mA
Max. current consumption per color	60 mA
Max. current consumption of beeper	35 mA
Input type	AC
Response time typical	< 500 ms
<b>Mechanical data</b>	
Cascadable	No
Design	Smooth barrel, TL50
Dimensions	Ø 50 x 237.2 x 237.2 mm
Housing material	Plastic, ABS/Polycarbonate, Black
Window material	Polycarbonate, diffuse
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Ambient temperature	-20...+50 °C

## Technical data

Relative humidity	0...95 %
Protection class	IP67
<b>Tests/approvals</b>	
Approvals	CE, UL listed