


Part #

FLK14-01744

KM 10/11/2013

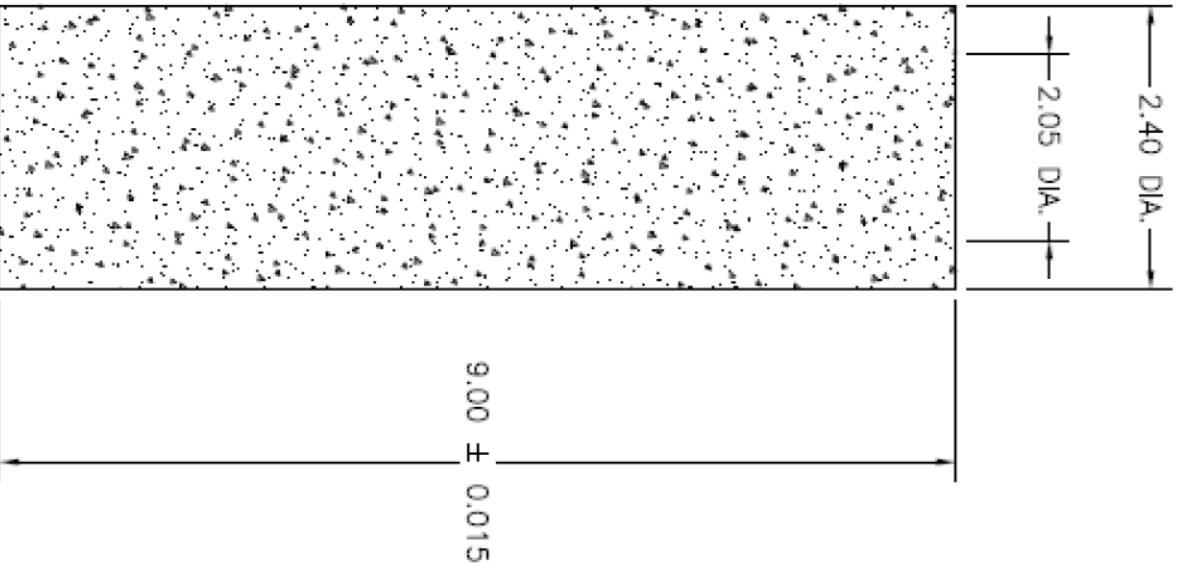

Loose o-ring (Buna)



SPECIFICATIONS:

DRY FILTER FLOW RATING: 191 SCFM@ 1.0 PSID, 100 PSIG
COALESCING EFFENCY: 99.97% @ 0.3 MICRONS
MAXIMUM OPERATING TEMPERATURE: 225F
FLOW DIRECTION: IN TO OUTSIDE

MATERIALS OF CONSTRUCTION

FILTER MEDIA: BOROSILICATE GLASS WITH EPOXY BINDER

Fluitek
C O R P O R A T I O N

CONFIDENTIAL & PROPRIETARY NOT FOR REPRODUCTION
This document is for qualification compliance only and is not to be distributed to any other parties.